



***THE LEGEND RISES
BE BOLD BE STRONG***



ASCENDO

***Forklift Tire, Skid Steer Tire, Telehandler Tire,
Motorcycle Tire, and Inner Tube***



www.ascendosolidtire.com

ABOUT US

PT Arami Jaya is a professional company that is committed to producing the best quality tires and tubes for motorcycles, trucks and forklift producers in the world, reputable for its high-quality products, supported by the best production technologies, and managed by thorough international standard quality control systems. With our SNI, ISO 9001:2015, Europe Chemical Compliance (REACH) and others, our products are successfully exported to Europe, the US, and all around the globe.



Our Company

We are pleased to present our new line of solid tires, which we believe will meet your business needs. Our company has a long history and extensive experience in the solid tire industry, and we are proud to offer a complete range of tires and tubes.

Sustainability

At ASCENDO, we believe that sustainable and ethical business practices can enhance our capacity to innovate and adapt to future challenges, thereby potentially adding value to the company. By integrating sustainability into our core strategy, we are better able to identify potential risks and opportunities and facilitate important change processes. We believe that our commitment to sustainability provides an important catalyst for innovation.




Technology & Innovation

We pride ourselves on our expertise in tires. We are proud to say that for half a century, our technological innovations have helped to ensure safety. We are proud to say that our tire technology advancements can benefit every vehicle, regardless of its drivetrain. We are proud to play a role in shaping the future of mobility.



Trusted Around The Globe

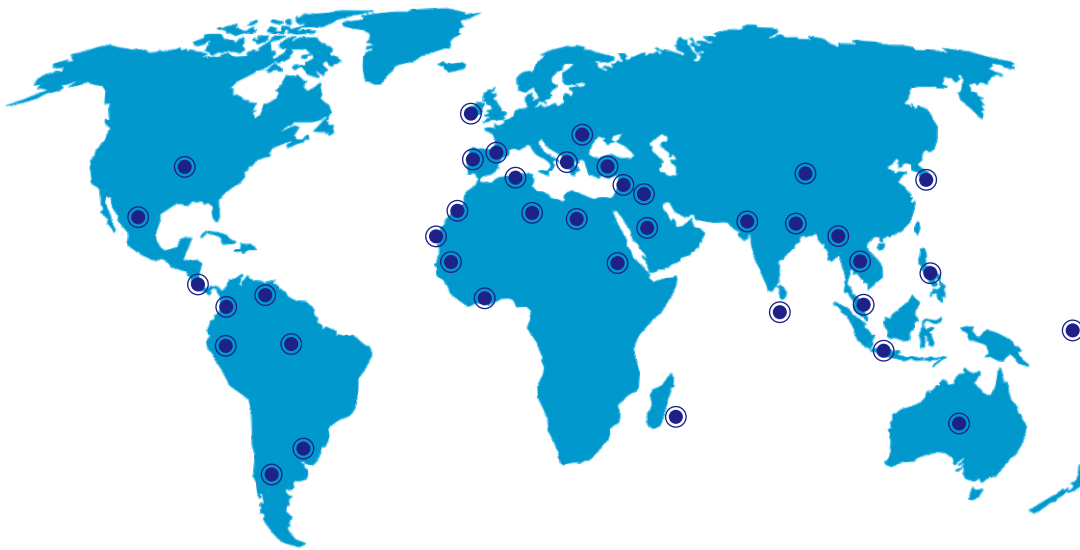

ASIA

Bangladesh
China
Hongkong
Japan
Malaysia
Maldives
Mongolia
Pakistan
Philippines
Singapore
South Korea
Taiwan
Thailand
Vietnam
Cambodia

MIDDLE EAST

Afganistan
Dubai
Egypt
Guatemala
Iran
Kuwait
Lebanon
Saudi Arabia
Syria
Turkey
U.A.E
Yamen
Jordan

EUROPE

Albania
France
Greece
Hungary
Ireland
Portugal
Serbia
Spain
Ukraine
Italy
United Kingdom

AFRICA

Ghana
Mauritania
Mauritius
Maroco
Senegal
Sudan
Tunisia
Libya

AUSTRALIA

Australia

AMERICA

U. S.A
El Savador


OCEANIA

Fiji

SOUTH AMERICA

Argentina
Brazil
Colombia
Ecuador
Mexico
Peru
Uruguay

ASCENDO

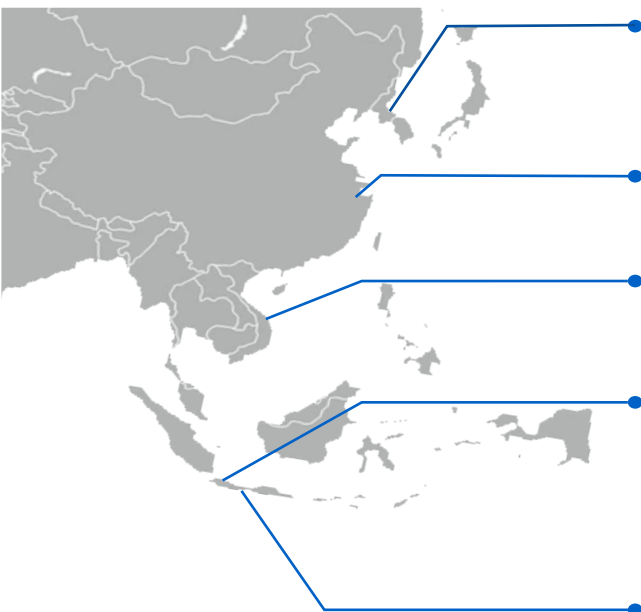

Ascendo Korea

35, Sansu-ro 645beon-gil,
Chowol-eup,
Gwangju-si, Gyeonggi-do, Korea

Ascendo China

B-902, 1000 Hong Quan Lu, Min
Hang Qu, Shang Hai, China

Ascendo Vietnam Sale Branch

Dai Minh Tower 5Th Fl. Tan My
Ward, HCM City, Vietnam

PT. Ascendo Indonesia

Jl. Palmerah Barat No. 8, RT 003
RW 003
Kel. Grogol Utara, Kec. Kebayoran
Lama, Jakarta 12210, Indonesia

PT. Arami Jaya Factory Head Office

Jln. Daendels Harjobinangun,
Grabag 54265, Purworejo,
Central Java, Indonesia

OUR GROUP

Special Features of Ascendo Solid Resilient Tires :



Heat Resistance

Continuous operation ensured by low built-up structure compound



Cut Resistance

Reduces chunking and cutting on rough and jagged surfaces



Mileage

Wide tread and maximum volume of the wear-resistant compound for



Cushion

Shock absorbance and enhanced driver comfort

ASCENDO

Resilient Tire Lining

TREAD LAYER

Designed to endure wear and abrasions while at the same time provides high durability and tear resistance during work.

CENTER LAYER

Natural rubber compound provides low heat buildup, rolling resistance, deflection without reducing its softness and pliancy.

BASE LAYER

Combined with steel reinforced rings for stability and perfect grip.



S2000



S3000



S3000 WHITE



SOLID TIRE

S200 (XN-058)



S300 (XN-018)



S400 (XN-028)



TRACTION BLACK




TRACTION WHITE



SMOOTH



SMOOTH GREY



POB

L2



L5



RIB



SKID STEER & TELEHANDLER

Ground Support Equipment Tires



Meticulously Engineered for Unmatched Performance, Effortless Access, and Enhanced Productivity

SKIID STEER			Overall Diameter	Pattern Width	Section Width	Weight	Note
Size	Pattern	Rim	mm	mm	mm	kg	
31x10-20	L2	7.50	783	231	250	67.8	
33x12-20	L2	7.50	837	271	295	93.8	
31x10-20	L5	7.50	778	228	250	66.5	coming soon
33x12-20	L5	7.50	833	268	295	97.3	coming soon



Telehandler tires are designed to be tough for tough terrain, with strong grip and high wear resistance for longer use.

Telehandler			Overall Diameter	Pattern Width	Section Width	Weight	Note
Size	Pattern	Rim	mm	mm	mm	kg	
13.00x24	L2	8.50	1290		320	310	coming soon
14.00x24	L2	8.50	1345		750	380	coming soon




Crafted from premium natural rubber with no marking agents, reinforced by advanced adhesive technology for an unbreakable bond to the steel ring

<i>AWP TIRE</i>			Overall Diameter	Pattern Width	Section Width	Weight	Note
Size	Pattern	Rim	mm	mm	mm	kg	
12X4							COMING SOON
15X5-7							COMING SOON
323X100							COMING SOON
230X80							COMING SOON
600X190							COMING SOON

***Puncture Resistance
Enhanced Stability
Durability and Longevity
Minimizing Surface Damage***



BE BOLD BE STRONG

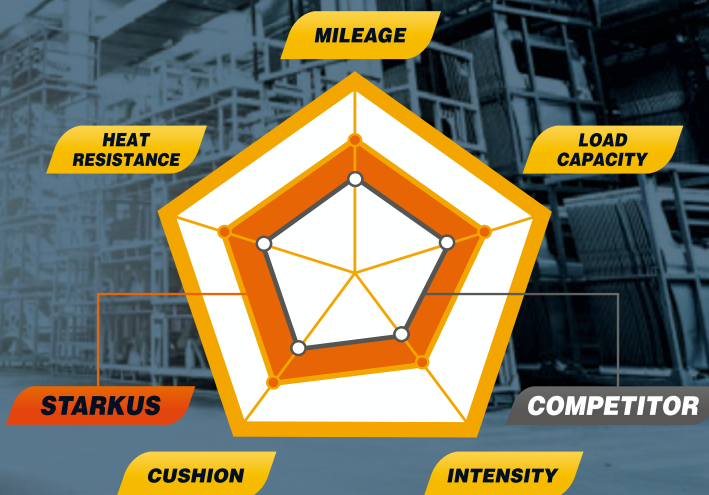

S 3000

				O.D. mm	S.W. mm	Weight (kg) Black Grey		Load Capacity (kg)				
Size	Type	LIP	STD. Rim					Forklift		Others		
								Load	Steer	Up to 6km/h	Up to 10km/h	Up to 25km/h
15x4.5-8	Solid	✓	3.00D-8	380	111	9.80	9.70	1040	800	1040	945	800
16x6-8	Solid	✓	4.33F-8	414	418	15.80	16.20	1495	1150	1495	1360	1150
5.00-8	Solid	✓	3.00D-8	452	120	15.90	16.30	1415	1090	1415	1285	1090
18x7-8	Solid	✓	4.33R-8	450	153	20.55	21.20	2145	1650	2145	1945	1650
6.00-9	Solid	✓	4.00	525	145	27.10	27.50	1885	1450	1885	1710	1450
21x8-9	Solid	✓	6.00E-09	522	185	35.00	35.40	2755	2120	2755	2500	2120
140/55-9	Solid	✓	4.00E-09	382	130	10.75	11.30	1170	900	1170	1060	900
200/50-10	Solid	✓	6.50F-10	460	198	25.00	25.40	2470	1900	2470	2240	1900
6.50-10	Solid	✓	5.00	572	162	36.00	36.00	2340	1800	2340	2125	1800
23x9-10	Solid	✓	6.50F-10	582	203	48.00	48.80	3445	2650	3445	3125	2650
7.00-12	Solid	✓	5.00	655	173	48.80	49.00	2920	2240	2920	2645	2240
23x10-12	Solid	✓	8.00G-12	588	238	52.50	53.30	3770	2900	3770	3420	2900
27x10-12	Solid	✓	8.00G-12	676	246	75.50	76.50	3900	3000	3900	3540	3000
6.00-15	Solid		4.50E-15	690	153	43.00	43.80	2455	1820	2455	2095	1820
7.00-15	Solid	✓	5.50-15	733	171	57.60	57.70	3545	2725	3545	3215	2725
28x9-15	Solid	✓	7.00	688	212	59.20	60.10	3445	2650	3445	3125	2650
8.25-15	Solid	✓	6.50F-15	810	208	91.00	91.70	4750	3650	4750	4300	3650
250-15 _(250/70-15)	Solid	✓	7.00	715	225	69.00	70.40	4775	3650	4775	4310	3650
	Solid	✓	7.50	715	225	69.40	70.90	4775	3650	4775	4310	3650
300-15 _(315/70-15)	Solid	✓	8.00-15	802	255	109.50	110.00	5850	4500	5850	5310	4500
355/45-15	Solid	✓	9.75	688	300	80.00	81.20	5690	4375	5690	5165	4375
355/50-15	Solid	✓	9.75	712	300	89.00	90.30	5690	4375	5690	5165	4375
355/65-15	Solid	✓	9.75	818	310	130.00	132.00	7800	6000	7085	6430	5450
11.00-20	Solid		7.50	1072	275	211.00	214.20	6540	5450	6540	5940	5450
	Solid		8.00	1072	275	211.25	214.40	6540	5450	6540	5940	5450



ASCENDO

S2000

				O.D.	S.W.	Weight (kg)	Load Capacity (kg)				
							Forklift		Others		
Size	Type	LIP	STD. Rim	mm	mm	Black	Load	Steer	Up to 6km/h	Up to 10km/h	Up to 25km/h
15x4-1/2-8	Solid	✓	3.00D	380	109	9.70	1040	800	1040	945	800
16x6-8	Solid	✓	4.33R	414	141	16.50	1495	1150	1495	1360	1150
5.00-8	Solid	✓	3.00D	453	115	16.40	1415	1090	1415	1285	1090
18x7-8	Solid	✓	4.33R	451	148	20.80	2145	1650	2145	1945	1650
140/55-9	Solid	✓	4.00E	382	130	11.00	1170	900	1170	1060	900
6.00-9	Solid	✓	4.00E	528	141	28.00	1885	1450	1885	1710	1450
21x8-9	Solid	✓	6.00E	523	186	35.40	2755	2120	2755	2500	2120
200/50-10	Solid	✓	6.50F	461	195	24.90	2470	1900	2470	2240	1900
6.50-10	Solid	✓	5.00F	574	157	36.50	2340	1800	2340	2125	1800
23x9-10	Solid	✓	6.50E	587	199	49.10	3445	2650	3445	3125	2650
7.00-12	Solid	✓	5.00S	655	170	49.40	2920	2240	2920	2645	2240
23x10-12	Solid	✓	8.00G	592	237	52.60	3770	2900	3770	3420	2900
27x10-12	Solid	✓	8.00G	677	237	75.50	3900	3000	3900	3540	3000
6.00-15	Solid		4.50E	697	151	43.00	2455	1820	2455	2095	1820
7.00-15	Solid		5.50	739	170	57.70	3545	2725	3545	3215	2725
7.50-15	Solid		6.00	765	194	74.20	3900	3000	3900	3540	3000
	Solid		6.50	765	194	74.50	3900	3000	3900	3540	3000
28x9-15	Solid	✓	7.00	692	208	59.50	3900	3000	3445	3540	3000
250-15 _(250/70-15)	Solid	✓	7.00	711	222	69.00	4745	3650	4745	4310	3650
	Solid	✓	7.50	711	222	69.40	4745	3650	4745	4310	3650
8.25-15	Solid	✓	6.50F	813	198	91.50	4750	3650	4750	4300	3650
300-15 _(315/70-15)	Solid	✓	8.00	811	255	109.00	5850	4500	5850	5310	4500
7.50-16	Solid	✓	6.00	789	185	76.60	3950	3600	3.950	3050	4605
9.00-20	Solid		7.00	1013	229	151.40	5400	4500	5400	4905	4500
	Solid		7.50	1013	230	152.00	5400	4500	5400	4905	4500
10.00-20	Solid		7.50	1030	250	171.50	6000	5000	6000	5450	5000
	Solid		8.00	1030	250	172.20	6000	5000	6000	5450	5000
12.00-20	Solid		8.00	1100	280	227.00	7560	6300	7560	6865	6300
	Solid		8.50	1100	280	227.00	7560	6300	7560	6865	6300
4.00-8	Solid	RIB	37.5D	404	112	11.30	950	730	950	860	730
10.00-20	Solid	Smooth	7.50	1016	225	171.50	6000	5000	6000	5450	5000
	Solid	Smooth	8.00	1016	251	155.50	6000	5000	6000	5450	5000



S 3000

Size	Type	LIP	STD. Rim	O.D. mm	S.W. mm	Weight (kg)		Load Capacity (kg)				
						Black	Grey	Forklift		Others		
								Load	Steer	Up to 6km/h	Up to 10km/h	Up to 25km/h
15x4.5-8	Solid	✓	3.00D-8	380	111	9.80	9.70	1040	800	1040	945	800
16x6-8	Solid	✓	4.33F-8	414	418	15.80	16.20	1495	1150	1495	1360	1150
5.00-8	Solid	✓	3.00D-8	452	120	15.90	16.30	1415	1090	1415	1285	1090
18x7-8	Solid	✓	4.33R-8	450	153	20.55	21.20	2145	1650	2145	1945	1650
6.00-9	Solid	✓	4.00	525	145	27.10	27.50	1885	1450	1885	1710	1450
21x8-9	Solid	✓	6.00E-09	522	185	35.00	35.40	2755	2120	2755	2500	2120
140/55-9	Solid	✓	4.00E-09	382	130	10.75	11.30	1170	900	1170	1060	900
200/50-10	Solid	✓	6.50F-10	460	198	25.00	25.40	2470	1900	2470	2240	1900
6.50-10	Solid	✓	5.00	572	162	36.00	36.00	2340	1800	2340	2125	1800
23x9-10	Solid	✓	6.50F-10	582	203	48.00	48.80	3445	2650	3445	3125	2650
7.00-12	Solid	✓	5.00	655	173	48.80	49.00	2920	2240	2920	2645	2240
23x10-12	Solid	✓	8.00G-12	588	238	52.50	53.30	3770	2900	3770	3420	2900
27x10-12	Solid	✓	8.00G-12	676	246	75.50	76.50	3900	3000	3900	3540	3000
6.00-15	Solid		4.50E-15	690	153	43.00	43.80	2455	1820	2455	2095	1820
7.00-15	Solid	✓	5.50-15	733	171	57.60	57.70	3545	2725	3545	3215	2725
28x9-15	Solid	✓	7.00	688	212	59.20	60.10	3445	2650	3445	3125	2650
8.25-15	Solid	✓	6.50F-15	810	208	91.00	91.70	4750	3650	4750	4300	3650
250-15 _(250/70-15)	Solid	✓	7.00	715	225	69.00	70.40	4775	3650	4775	4310	3650
	Solid	✓	7.50	715	225	69.40	70.90	4775	3650	4775	4310	3650
300-15 _(315/70-15)	Solid	✓	8.00-15	802	255	109.50	110.00	5850	4500	5850	5310	4500
355/45-15	Solid	✓	9.75	688	300	80.00	81.20	5690	4375	5690	5165	4375
355/50-15	Solid	✓	9.75	712	300	89.00	90.30	5690	4375	5690	5165	4375
355/65-15	Solid	✓	9.75	818	310	130.00	132.00	7800	6000	7085	6430	5450
11.00-20	Solid		7.50	1072	275	211.00	214.20	6540	5450	6540	5940	5450
	Solid		8.00	1072	275	211.25	214.40	6540	5450	6540	5940	5450



S400 (XN-28)

					O.D.	S.W.	Weight (kg)	Load Capacity (kg)
Pattern	Size	Type	LIP	STD. Rim	mm	mm	Black	Up to 6km/h
S400	5.00-8	Solid	—	3.00	455	120	15.40	1415
S400	16x6-8	Solid	✓	4.33	413	148	16.00	1495
S400	18x7-8	Solid	✓	4.33R	452	165	21.80	2145
S400	6.00-9	Solid	✓	4.00E	530	143	25.40	1885
S400	7.00-9	Solid	—	5.00	553	172	35.00	2340
S400	21x8-9	Solid	—	6.00E	526	190	34.40	2755
S400	6.50-10	Solid	✓	5.00F	576	162	35.40	2340
S400	7.00-12	Solid	✓	5.00S	655	177	47.90	2920
S400	28x9-15	Solid	✓	7.00	699	218	59.30	3900



S300 (XN-18)

					O.D.	S.W.	Weight (kg)	Load Capacity (kg)
Pattern	Size	Type	LIP	STD. Rim	mm	mm	Black	Up to 6km/h
S300	6.50-10	Solid	—	5.00	576	162	35.00	2340
S300	23x9-10	Solid	✓	6.50	592	202	47.85	3445
S300	8.25-15	Solid	—	6.50	819	212	92.00	4615
S300	28X9-15	Solid	—	7.00	699	218	60.4	3900



S200

					O.D.	S.W.	Weight (kg)	Load Capacity (kg)
Pattern	Size	Type	LIP	STD. Rim	mm	mm	Black	Up to 6km/h
S200	4.00-8	Solid	✓	6.50E	404	108	11.14	950



PRESS ON BAND

 PRESS ON BAND				BAND		OD	SW	Weight (kg)		Load Capacity(kg)					
				ID (Φ) (mm)	Width (mm)					~6km/h		~16km/h		~25km/h	
NO	SIZE (inci)	SIZE (mm)	PAT.			mm	mm	Black	Grey	Load	Steer	Load	Steer	Load	Steer
1	10X5X6-1/2	254x127x165,1	Smooth	164.59	127.00	252	120	7.10	7.30	1010	830	905	760	735	605
2	14x4-1/2x8	356x114x203.2	Smooth	202.69	114.30	355	108	11.20	11.50	1170	960	1045	875	850	695
3	15x5x11-1/4	381x127x285.8	Smooth	285.12	127.00	382	120	12.70	12.80	1390	1140	1240	1040	1010	830
4	16x5x10-1/2	406x127x266.7	Smooth	266.07	127.00	407	120	14.70	15.10	1510	1240	1345	1130	1095	895
5		406x127x266.7	Traction	266.07	127.00	408	122	14.60	14.90	1510	1240	1345	1130	1095	895
6	16x6x10-1/2	406x152x266.7	Smooth	266.07	152.40	407	143	18.00	18.30	1910	1570	1710	1435	1390	1140
7		406x152x266.7	Traction	266.07	152.40	408	147	17.70	17.80	1910	1570	1710	1435	1390	1140
8	16-1/4x5x11-1/4	413x127x285.8	Smooth	285.12	127.00	412	120	15.00	15.20	1530	1250	1360	1145	1105	905
9		413x127x285.8	Traction	285.12	127.00	413	122	14.50	14.80	1530	1250	1360	1145	1105	905
10	16-1/4x6x11-1/4	413x152x285.8	Smooth	285.12	152.40	412	145	17.90	18.20	1920	1580	1715	1440	1395	1140
11		413x152x285.8	Traction	285.12	152.40	412	147	17.60	18.00	1920	1580	1715	1440	1395	1140
12	18x6x12-1/8	457x152x308	Smooth	307.34	152.40	455	145	21.20	21.60	2100	1720	1870	1575	1525	1250
13		457x152x308	Traction	307.34	152.40	456	147	21.10	21.20	2100	1720	1870	1575	1525	1250
14	18x7x12-1/8	457x178x308	Smooth	307.34	177.80	454	170	24.22	25.20	2550	2100	2280	1910	1855	1520
15		457x178x308	Traction	307.34	177.80	456	172	23.80	24.29	2550	2100	2280	1910	1855	1520
16	18x8x12-1/8	457x203x308	Smooth	307.34	203.20	456	195	30.80	31.50	3000	2475	2680	2250	2180	1790
17	21x7x15	533x178x381	Smooth	380.14	177.80	533	168	30.50	31.30	2875	2350	2560	2150	2085	1710
18		533x178x381	Traction	380.14	177.80	535	172	30.10	30.80	2875	2350	2560	2150	2085	1710
19	21x8x15	533x203x381	Smooth	380.14	203.20	533	194	39.00	39.70	3375	2775	3025	2540	2455	2015
20		533x203x381	Traction	380.14	203.20	534	197	38.40	38.60	3375	2775	3025	2540	2455	2015
21	22X8X16	559x203x406,3	Smooth	405.54	203.20	558	185	41.00	41.80	3500	2875	3130	2625	2545	2085
22		559x203x406,4	Traction	405.54	203.20	557	197	40.40	41.30	3500	2875	3130	2625	2545	2085
23	22x9x16	559x229x406.4	Smooth	405.54	228.60	557	221	46.00	46.80	4050	3325	3600	3025	2930	2400
24		559x229x406.4	Traction	405.54	228.60	556	223	44.80	45.20	4050	3325	3600	3025	2930	2400
25	22x12x16	559x305x406.4	Smooth	405.54	304.80	556	297	62.00	62.40	5625	4625	5030	4225	4090	3350
26		559x305x406.4	Traction	405.54	304.80	555	298	60.40	60.60	5625	4625	5030	4225	4090	3350
27	28X12X22	711x305x559	Smooth	557.68	304.80	711	290	91.00	91.80	6740	5540	6020	5060	4900	4015
28		711x305x560	Traction	557.68	304.80	712	298	90.00	90.80	6740	5540	6020	5060	4900	4015
29	28X16X22	711x406x560	Smooth	557.68	406.40	712	390	122.00	124.00	9270	7620	8280	6950	6730	5520
30	9X5X5	228x127x127	Smooth			230	127	6.75	COMING SOON						
31	13-1/2X4-1/2X8	342.9x50x114.3x203	Smooth			345	114	10.70	Available for order from December						
32		342.9x50x114.3x203	Traction			345	114	10.70	Available for order from December						
33	13-1/2X5-1/2X8	342.9x50x139.7x203	Smooth			345	140	12.70	Available for order from December						
34		342.9x50x139.7x203	Traction			345	140	12.70	Available for order from December						
35	14X5X10	355.6x127x254	Smooth			358	127	12.40	Available for order from December						
36	16X7X10-1/2	406.4x177.8x266.7	Smooth			408	178	21.90	Available for order from December						
37	18X8X12-1/8	457.2x203.2x307.34	Traction			459	203	30.10	Available for order from December						



ASCENDO

***COMMERCIAL, INDUSTRIAL
& AGRICULTURAL INNER TUBES***



***MOTORCYCLE TUBES
BUTYL & NATURAL RUBBER***

No	Size	Valve	Weight (g)
			Tube + Valve
1	400-8	TR13	345
2	400-8	TR15	347
3	400-8	JS2	367
4	500-8	JS2	487
5	600-9	JS2	657
6	650-10	JS2	742
7	ER-10	TR13	455
8	ER-10	TR15	457
9	700-12	TR75A	1,011
10	700-12	JS2	967
11	DR-12	TR13	440
12	ER-12	TR13	525
13	FR-12	TR13	625
14	10.0/80-12	TR15	1,467
15	ER-13	TR13	560
16	FR-13	TR13	672
17	GR-13	TR13	768
18	ER-14	TR13	635
19	FR-14	TR13	709
20	600/650-14	TR13	765
21	GR-14	TR13	815
22	KR-14	TR13	915
23	MR-14	TR75A	1,181
24	DR-15	TR13	537
25	FR-15	TR13	780
26	FR-15	TR75A	846
27	500/600-15	JS2	802
28	GR-15	TR13	870
29	KR-15	TR13	995
30	KR-15M	TR13	965
31	MR-15	TR13	1,185
32	G60R15	TR13	850
33	700-15	TR75A	1,181
34	750-15	TR75A	1,305
35	815-15	TR177A	1,367
36	825-15	TR75A	1,581
37	10.0/75-15.3	TR15	1,547
38	1000-15	TR75A	1,988
39	11.5/80-15.3	TR15	2,017
40	400/60-15.5	TR15	3,252
41	11L-15/16	TR15	1,767
42	600-16	TR13	895
43	650-16	TR75A	1,075
44	KR-16	TR75A	1,081
45	KR-16D	TR177A	1,087
46	750-16	TR75A	1,327
47	750-16	TR15	1,199
48	825-16	TR177A	1,767
49	825-16	TR13	1,767
50	900-16	TR13	1,820

No	Size	Valve	Weight (g)
			Tube + Valve
51	1000-16	TR15	2,157
52	750-18	TR15	1,617
53	10.5/80-18	TR15	2,137
54	12.5/80-18	TR218A	2,435
55	600-19	TR15	1,007
56	650-20	TR15	1,357
57	750-20	TR15	1,717
58	825-20	TR77A	2,140
59	900-20	TR78A	2,334
60	825-16	TR78A	2,334
61	1000-20N	TR78A	3,045
62	1000-20D	TR78A	3,045
63	1100-20M	V3-04-5	3,025
64	1100-20	TR78A	3,387
65	1100-20D	TR78A	3,387
66	1200-20M	V3-04-5	3,340
67	1200-20	TR78A	3,539
68	1200-20D	TR78A	3,711
69	1400-20	TR78A	4,629
70	1400-20	V3-06-5	4,663
71	1600-20	V3-06-5	5,583
72	16.0/70-20	TR75A	4,611
73	1100-22	TR78A	3,619
74	1100-24	TR78A	3,599
75	1200-24M	V3-06-5	4,083
76	1200-24	TR78A	3,599
77	1300-24	TR179A	4,545
78	1400-24	TR179A	4,865
79	8.3/8-24	TR218A	1,955
80	9.3/9-24	TR218A	2,555
81	12.4/13.6-24	TR218A	4,055
82	16.9/14.9-24	TR218A	4,975
83	16.9/14.9-24M	TR218A	4,735
84	15.5-25	TRJ1175C	4,949
85	15.5-25	TR218A	4,815
86	KM24	TR218A	4,815
87	17.5-25	TRJ1175C	6,819
88	20.5-25	TRJ1175C	9,689
89	23.5-25	TRJ1175C	11,189
90	23.5-25	TR218A	11,189
91	11.2-28	TR218A	3,855
92	13.6/14.9-28	TR218A	4,905
93	16.9/14.9-28	TR218A	6,155
94	16.9/18.4-30	TR218A	6,955
95	12.4/11-32	TR218A	4,355
96	16.9/18.4-34	TR218A	7,375
97	9.3/9-36	TR218A	3,495
98	12.4/11.2-36	TR218A	4,755
99	13.6/12-38	TR218A	6,155
100	16.9/18.4-38	TR218A	8,140
101	20.8-38	TR218A	10,155



NO	Size	Type	Weight (kg)	Width (cm)
1	7.00/7.50R15	Standard	1.14	17.1
2	7.00/7.50R16	Standard	1.00	17.0
3	7.50/8.25R16	Standard	1.50	18.0
4	8.25/9.00R20	Standard	1.70	18.1
5	10.00/11.00R20	Standard	2.35	21.0
6	11.00/12.00R20	Standard	2.75	23.5
7	12.00R24	Standard	3.23	24.0
8	1400-20	Standard	3.30	26.2
9	1300/1400-24	Standard	3.60	25.5
10	1300/1400-25	Standard	5.00	26.5
11	17.5-25	Standard	5.70	32.0
12	20.5-25	Standard	6.80	42.5
13	23.5-25	Standard	9.00	50.0
14	26.5-25	Standard	11.30	57.0
15	1600-25	Standard	5.20	274.0
16	600-9	Standard	0.45	120.0
17	650-10	Standard	0.55	130.0
18	700-12	Standard	0.80	130.0
19	28X9-15	Standard	1.50	180.0
20	20.5/70-16	Standard	1.80	180.0
21	16/70-20	Standard	2.80	315.0
22	7.00/7.50R15	Metal Plate	1.16	17.1
23	750/825R16	Metal Plate	1.53	18.0
24	825/900R20	Metal Plate	1.73	18.1
25	10.00/11.00R20	Metal Plate	2.38	21.0
26	11.00/12.00R20	Metal Plate	2.78	23.5
27	12.00R24	Metal Plate	3.23	24.0
28	1400-20	Metal Plate	3.30	26.2
29	1300/1400-24	Metal Plate	3.60	25.5
30	1300/1400-25	Metal Plate	5.00	26.5
31	17.5-25	Metal Plate	5.70	32.0
32	20.5-25	Metal Plate	6.80	42.5
33	23.5-25	Metal Plate	9.00	50.0
34	26.5-25	Metal Plate	11.30	57.0
35	1600-25	Metal Plate	5.20	274.0
36	600-9	Metal Plate	0.45	120.0
37	650-10	Metal Plate	0.55	130.0
38	700-12	Metal Plate	0.80	130.0
39	28X9-15	Metal Plate	1.50	180.0
40	20.5/70-16	Metal Plate	1.80	180.0
41	16/70-20	Metal Plate	2.80	315.0



NO	MOLD SIZE	Weight (g) Butyl
1	2.50/3.00-4	130
2	3.50/4.00-4	160
3	3.00/3.50-5	175
4	3.00-8 (13X3)	210
5	2.50/2.75-10	210
6	3.50/4.00-5	210
7	2.75/3.00-10	255
8	2-16/17	240
9	2.00-16	240
10	2.00-17	280
11	2.25/2.50-14	285
12	2-18	285
13	2.00-18	285
14	4.00-6	260
15	2.50/2.75-12	280
16	2.75/3.00-12	300
17	2-19	300
18	2.00-19	300
19	2.25/2.50-16	320
20	2.50/2.75-14	290
21	2.75/3.00-14	350
22	3.00/3.25-10	300
23	145/70-6	300
24	3.00/3.25-8	310
25	3.25/3.50-8	320
26	3.50-8	330
27	2.25/2.50-17	330
28	2.50/2.75-16	360
29	3.50-10	320
30	2.25/2.50-18	345

NO	MOLD SIZE	Weight (g) Butyl
31	2.25/2.50-19	370
32	2.50/2.75-17	375
33	2.75/3.00-16	395
34	4.00-8	350
35	3.00-25	360
36	2.50/2.75-18	400
37	2.75/3.00-17	415
38	2.50/2.75-19	385
39	2.75/3.00-18	435
40	2.50/2.75-21	460
41	2.75/3.00-19	460
42	3.00/3.25-16	450
43	2.75/3.00-21	510
44	3.00/3.25-17	450
45	5.00-10	465
46	3.00/3.25-18	480
47	3.25/3.50-16	455
48	4.00-15	535
49	3.25/3.50-17	530
50	3.25/3.50-18	500
51	3.50/3.75-16	560
52	3.00/3.25-21	580
53	3.50/3.75-18	600
54	4.00-17	610
55	4.00-18	620
56	5.00-16	625
57	5.00-17	650
58	4.50-18	735
59	5.00-19	760



MC NATURAL TUBE

ASCENDO
INTERNATIONAL

NO	MOLD SIZE	Weight (g) Natural
1	2.00-17	320
2	2.25/2.50-14	315
3	2.25/2.50-16	350
4	2.25/2.50-17	370
5	2.25/2.50-18	380
6	2.25/2.50-19	410
7	2.50/2.75-14	310
8	2.50/2.75-17	400
9	2.50/2.75-18	435
10	2.50/2.75-19	460
11	2.50/2.75-21	500
12	2.75/3.00-14	330
13	2.75/3.00-17	420
14	2.75/3.00-18	450
15	2.75/3.00-19	500
16	2.75/3.00-21	520
17	3.00-8 (13X3)	250
18	3.00/3.25-8	250
19	3.00/3.25-10	330
20	3.00/3.25-16	435
21	3.00/3.25-17	450
22	3.00/3.25-18	480
23	3.25/3.50-18	520
24	3.50-8	340
25	3.50-10	330
26	3.50/3.75-18	635
27	4.00-8N	370
28	4.00-17	635
29	4.00-18	700



MOTORCYCLE TUBES NATURAL RUBBER

ASCENDO



THE JOURNEY ACCOMPLICE

SPECIAL COMPOUND

LONG LIFE [LL]

High mileage, touring request, buildup rubbers plus high durable compound import to our long life series.



HANDLING



MILEAGE

TUBELESS & TUBE TYPE

High grip, pinched and frictional heat; also stronger carcass and different specification, it's a high quality production .



DRY GRIP



ROLLING



HANDLING

WINTER PURPOSE: ICE PRO

Well-developed rubber tread and sidewall for winter, ICE PRO rubber compound more grip and more comfortable



DRAINAGE



ICE PRO




COMFORT



TECHNOLOGY

DUAL COMBO [DC]


Basic and standard combo

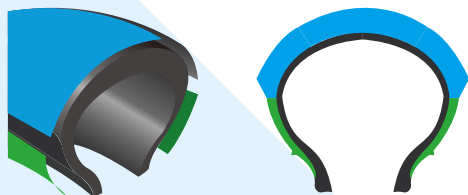

- Midle soft rubber for normal condition.
- Elastic, aging and flex fatigue resistance

SAFETY RIDE [SR-T1]

T1 : Additional nylon breaker
Interlaced nylon fabric under the tread to get good steering and stronger carcass, safety net for riders.

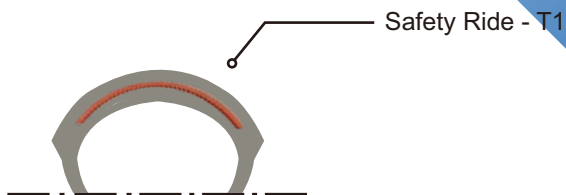

ON - ROAD



► MT **564**

T/L	
90/90-10	130/70-12
110/70-12	130/70-13
110/70-14	140/60-13
110/90-13	150/70-14
120/70-12	



► MT **551**

T/L
3.00-10
3.50-10
120/70-12
130/60-13
130/70-12



► MT **552**

T/L
120/70-13



► MT **553**

T/L
3.50-10



► MT **549**

T/L
120/70-12
130/70-12



► MT **546**

T/T
3.50-10



► MT **544**

T/L	
3.50-10	120/70-12
90/90-12	120/70-13
90/90-18	120/90-10
100/80-10	130/60-13
100/90-10	130/70-12
120/70-10	130/90-10



► MT **543**

T/L
120/70-13
130/60-13
130/70-13



► MT **542**

T/L
110/70-12
120/70-12

ON - ROAD



► MT **541**

T/L	
3.50-10	120/90-10
90/90-10	130/60-13
100/80-10	130/70-10
100/90-10	130/70-12
100/90-12	130/90-10
110/80-10	140/60-13
110/90-12	140/60-14
120/70-10	140/70-12
120/70-12	140/70-14
120/70-13	150/70-13
120/70-14	150/70-14
120/80-14	



► MT **540**

T/L	
3.50-10	120/80-14
90/90-10	120/90-10
90/90-12	130/60-13
100/80-10	130/70-10
100/90-10	130/70-12
110/70-11	130/90-10
110/80-10	140/60-13
110/90-12	140/60-14
120/70-10	140/70-12
120/70-12	140/70-14
120/70-13	150/70-13
120/70-14	150/70-14



► MT **539**

T/L	
90/90-10	130/70-10
100/90-10	130/70-11
110/80-10	130/70-12
110/90-13	130/70-13
120/70-10	130/80-12
120/70-12	130/90-10
120/80-12	140/60-13
120/90-10	140/70-12
130/60-13	



► MT **538**

T/L
120/70-13
130/70-13



► MT **537**

T/L
100/90-10



► MT **536**

T/L
90/90-10
100/80-10
100/90-10
110/70-11
120/70-10
120/70-12
130/70-11
130/70-12
140/70-12

ON - ROAD



▶ MT **533**

T/L
90/90-12
100/90-10



▶ MT **431**

T/L	T/T&T/L
3.00-10	2.75-17



▶ MT **430 M**

T/L
2.75-17



▶ MT **413**

T/L
2.75-18
90/90-17
90/90-18
100/80-17
110/80-17
110/80-18
130/70-17



▶ MT **412**

T/L	T/T&T/L
90/90-18	2.75-17
	2.75-18



▶ MT **411**

T/L
3.50-10



▶ MT **410**

T/L
3.00-10
90/90-10
90/90-12
100/90-17
110/90-16
120/90-17
140/60-17
140/90-17



▶ MT **408**

T/T	T/L	T/T&T/L
110/90-17	90/90-14	90/90-18
120/90-17	100/90-14	
	110/90-16	



▶ MT **407**

T/T
90/90-19
90/90-21

ON - ROAD



▶ MT

406R

T/T	T/L	T/T&T/L
80/100-14	90/90-17	100/90-18
90/90-18	110/80-17	
	110/90-18	
	130/70-17	



▶ MT

406F

T/T	T/L
2.75-18	80/90-18
60/100-17	



▶ MT

405

T/L	
3.00-10	90/80-17
3.50-10	90/90-12
70/90-14	90/90-14
70/90-16	90/90-16
70/90-17	90/90-17
80/80-17	100/70-17
80/80-18	100/80-14
80/90-14	100/90-14
80/90-16	110/70-17
80/90-17	



▶ MT

404

T/L
3.50-10



▶ MT

403

T/T&T/L
90/90-18
100/90-18



▶ MT

402

T/T
2.50-17
2.75-17
2.75-18
3.00-18



▶ MT

401

T/T
2.50-16



▶ MT

400

T/T
3.50-10



▶ MT

399

T/L	T/T&T/L
2.75-18	3.00-18
90/90-17	
90/90-18	
100/80-17	
110/80-17	
110/80-18	
130/70-17	
130/90-15	

ON - ROAD



▶ **MT 398**

T/T
3.00-17



▶ **MT 397**

T/L
70/90-14
70/90-17
80/90-14
90/90-14
110/80-17
130/70-17



▶ **MT 395**

T/T	T/T & T/L
80/90-14	70/90-14
90/90-14	



▶ **MT 394**

T/T
2.50-17
2.75-17



▶ **MT 393**

T/T
2.50-17
2.75-17
3.00-17



▶ **MT 391**

T/T
2.75-21
4.10-18



▶ **MT 388**

T/T	T/L	T/T&T/L
120/80-17	2.75-17	100/90-17
120/90-17		100/90-18



▶ **MT 387**

T/T	T/T&T/L
70/90-17	2.50-17
80/90-17	



▶ **MT 386**

T/T
2.50-17
2.75-17

ON - ROAD



▶ **MT 385**

T/T
80/90-18
90/90-18



▶ **MT 384**

T/T	T/L	T/T&T/L
2.00-17	70/80-17	70/90-17
2.25-17	100/70-17	80/90-14
2.50-17	110/70-17	80/90-17
2.50-18		90/90-14
2.75-17		
2.75-18		
3.00-17		
3.00-18		



▶ **MT 378**

T/T	T/L	T/T&T/L
2.75-18	2.50-17	2.75-17
3.00-17		
3.00-18		



▶ **MT 372**

T/T&T/L
90/90-18



▶ **MT 370**

T/L
110/90-16



▶ **MT 367**

T/T & T/L
2.75-17



▶ **MT 361**

T/T	T/L
3.25-16	3.00-16



▶ **MT 360**

T/L
2.75-16



▶ **MT 357**

T/L
130/90-15

ON - ROAD



▶ **MT 356**

T/L
90/90-18



▶ **MT 355**

T/T	T/L	T/T&T/L
2.50-17	70/90-16	70/90-14
2.75-17	70/90-17	90/80-14
60/80-17	80/80-14	90/90-14
70/80-17	80/80-17	
	80/90-14	
	80/90-16	
	80/90-17	
	90/80-17	
	90/90-16	
	100/80-14	
	100/80-16	
	100/90-10	
	100/90-14	
	110/70-13	
	120/70-14	
	120/80-16	
	130/70-13	



▶ **MT 354**

T/L
120/90-16



▶ **MT 352**

T/L
2.75-17



▶ **MT 351**

T/L
110/90-16



▶ **MT 350**

T/T & T/L
90/90-18



▶ **MT 339**

T/L
2.75-18



▶ **MT 338**

T/T
3.00-18

ON - ROAD



▶ **MT 337**

T/T
2.75-18



▶ **MT 333**

T/T
3.00-18



▶ **MT 332**

T/T
2.50-18 2.75-18



▶ **MT 330**

T/T	T/T & T/L
2.75-18	3.00-18



▶ **MT 328**

T/L
100/90-18



▶ **MT 325**

T/T
3.60-18



▶ **MT 324**

T/T
3.00-16 3.00-18 3.50-18



▶ **MT 321**

T/T
3.00-17 3.25-16 3.25-17



▶ **MT 317**

T/T
2.75-18

ON - ROAD



▶ **MT 316**

T/T

2.50-18
2.75-18



▶ **MT 315**

T/T

3.00-16
3.00-17
3.00-18



▶ **MT 314**

T/T

2.75-17
2.75-18



▶ **MT 313**

T/T

2.25-17
2.50-17
2.50-18



▶ **MT 310**

T/T

2.25-17
2.50-17
2.50-18
2.75-18



▶ **MT 247**

T/L

3.50-10
90/90-10
100/90-10
120/70-12
130/60-13
130/70-12



▶ **ST 019**

T/L

70/90-17
80/90-17



▶ **ST 018**

T/T

70/90-14
80/90-14
70/90-17
80/90-17



▶ **ST 017**

T/T

60/90-17
70/90-17
80/90-17

ASCENDO

ON - ROAD



▶ **ST 016**

T/T

60/90-17
70/90-17
80/90-17



▶ **ST 015**

T/T

70/90-17
80/90-17



▶ **ST 014**

T/T

70/90-14
80/90-14



▶ **ST 013**

T/T

2.50-17
2.75-17
70/90-14
80/80-14
80/90-14

T/L

90/80-14
90/90-14
100/80-14
110/80-14



▶ **ST 012**

T/T

2.50-17
2.75-17

T/L

80/80-14
90/80-14
100/80-14
110/80-14



▶ **ST 011**

T/L

80/80-14
90/80-14
100/80-14



▶ **ST 009**

T/T

2.50-17
2.75-17



▶ **ST 008**

T/T

2.50-17



▶ **ST 007**

T/T

2.25-17
2.50-17
2.75-17
80/80-17

T/L

80/90-17
90/80-17
90/90-17

ON - ROAD



► **ST 005**

T/T
70/90-17
80/90-17



► **ST 003**

T/L	T/T&T/L
70/90-17	70/80-17
	80/80-17
	80/90-17
	90/80-17



► **ST 001**

T/T
70/90-14
80/90-14
90/90-14



► **MT PRO 04**

T/L
80/90-14
90/90-14



► **MT PRO 03**

T/L	T/T&T/L
70/90-14	70/90-17
80/80-14	80/80-17
90/80-14	80/90-14
90/90-17	80/90-17
100/80-17	90/90-14
110/80-14	100/80-14
110/80-17	



► **MT PRO 02**

T/L	
80/80-14	100/80-17
80/80-17	110/80-17
90/80-14	120/80-17
90/80-17	130/70-17
100/80-14	



► **MT PRO 01**

T/L
70/90-14
80/90-14
90/90-14

OFF- ROAD



▶ **MT 409**

T/T	T/L
3.00-17	90/90-18
3.00-18	
3.00-21	
3.50-17	
4.10-18	



▶ **MT 349**

T/T
4.10-18



▶ **MT 348**

T/T
3.00-18
3.25-18
3.50-18



▶ **MT 345**

T/T
2.75-17
3.00-21



▶ **MT 344**

T/T
2.50-18
2.75-18
3.00-18
3.50-18
4.10-18
4.60-18
80/100-14
90/90-18
110/90-17



▶ **MT 343**

T/T
2.75-17
3.00-21
3.50-18
3.50-21
4.10-18



▶ **MT 341**

T/T	
2.50-17	3.00-18
2.50-18	3.00-21
2.75-17	3.25-18
2.75-18	3.50-18
2.75-19	4.00-18
2.75-21	70/90-14
3.00-17	80/90-14



▶ **MT 340**

T/T
2.50-17
2.50-18



▶ **ST 002**

T/T	T/T&T/L
2.50-17	2.75-17
3.00-18	

MOPED & OTHERS



▶ **MT 231**

T/T

2-1/4-16
2-1/4-17
2-1/4-19
2-16
2-17
2-19



▶ **MT 241**

T/T

2-1/4-16	2-1/2-17
2-1/4-17	2-3/4-16
2-1/4-18	2-3/4-17
2-1/4-19	2-16
2-1/2-16	2-17



▶ **MT 242**

T/T

2-1/4-16
2-1/4-17
2-1/4-18
2-1/2-16
2-1/2-17
2-3/4-17



▶ **MT 243**

T/T

2.50-10
2.75-10
3.00-12

T/T&TL

3.00-10
3.50-10



▶ **MT 245**

T/T

2-1/4-16
2-1/4-17



▶ **MT 430 B**

T/T

4.00-8



▶ **MT 437**

T/T

4.00-7



▶ **MT 442**

T/T

3.50-7



▶ **MT 466**

T/T

4.00-8



▶ **MT 522**

T/T

3.50-8
3.50-10

ASCENDO

TUBES



SIZE	Weight (g)	TR4	TR13	TR87	PV78A	JS87C	JS87CL
3.00 - 8	190		✓				
3.50 - 8	230		✓	✓		✓	
4.00 - 8	310		✓	✓		✓	
2.50 - 10	210			✓		✓	
2.75 - 10	235			✓		✓	
3.00 - 10	300			✓		✓	✓
3.50 - 10	310			✓		✓	
2.50 - 12	240			✓			
2.75 - 12	270	✓		✓			
2.25 - 14	250	✓					
2.50 - 14	285	✓					
2.75 - 14	310	✓					
3.00 - 14	350	✓					
4.00 - 15	510	✓			✓		
2.00 - 16	230	✓					
2.25 - 16	280	✓					
2.50 - 16	320	✓					
2.75 - 16	350	✓					
3.00 - 16	435	✓					
3.25 - 16	465	✓					
3.50 - 16	560	✓					
2.00 - 17	240	✓					

TUBES



SIZE	Weight (g)	TR4	TR13	TR87	PV78A	JS87C	JS87CL
2.25 - 17	320	✓					
2.50 - 17	350	✓					
2.75 - 17	370	✓					
3.00 - 17	450	✓					
3.25 - 17	495	✓					
3.50 - 17	570	✓					
4.00 - 17	600	✓					
2.00 - 18	260	✓					
2.25 - 18	335	✓					
2.50 - 18	370	✓					
2.75 - 18	390	✓					
3.00 - 18	480	✓					
3.25 - 18	530	✓					
3.50 - 18	600	✓					
4.00 - 18	620	✓	✓				
4.50 - 18	735	✓	✓				
2.00 - 19	280	✓					
2.25 - 19	340	✓					
2.50 - 19	385	✓					
2.75 - 19	420	✓					
2.50 - 21	420	✓					
2.75 - 21	450	✓					



ASCENDO

PT. ARAMI JAYA

Jl. Karet 4 Blok H 35 Batik Village 17550 West Java INDONESIA

PT ARAMI JAYA is a professional company that is committed to producing the best quality tires and tubes for motorcycles, trucks and forklift producers in the world, reputable for its high-quality products, supported by the best production technologies, and managed by thorough international standard quality control systems. With our SNI, ISO 9001:2015, Europe Chemical Compliance (REACH) and others, our products are successfully exported to Europe, the US, and all around the globe.